


## SEAL EXPANSION JOINT

Floor to Floor to Wall | Wall to Wall

25 - 75 mm ( 1 - 3" ) Expansion Gaps

# Flexatec 1200 : A01

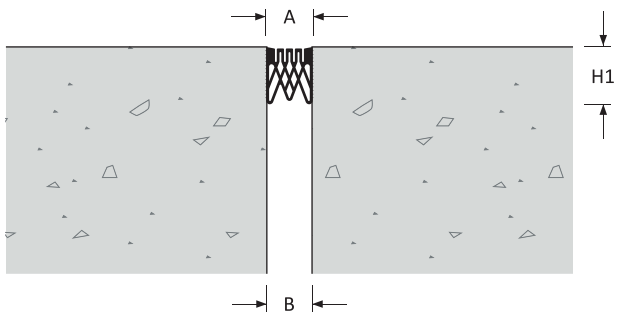

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
Floor – Floor	25	± 7	[15]	–	31 kN	30 kN	–	55	–	25	–	1200–A01–025
Floor – Wall	50	± 15	[30]					64		50		1200–A01–050
Wall – Wall	75	± 25	[50]							75		1200–A01–075

## Features

### Surface

Ribbed surface for improved slip resistance  
Americans with Disabilities Act (ADA) compliant  
across the entire movement cycle

### Movement

Good movement capacity  
ASTM E-1399 Class I: Thermal  
Class II: Wind

## Traffic Frequency per day

				
> 25,000	-	≤ 10	> 25,000	-


## System Options

Gap width(s)	25, 50, 75 mm
Height(s)	55, 64 mm
Metal type(s):	None
Colour(s)	Black coloured seal
Fire barrier	120-240 minutes
Pre-assembly in factory	Contact Vexcolt Europe

## SEAL EXPANSION JOINT

Floor to Floor to Wall | Wall to Wall  
25 - 75 mm ( 1 - 3" ) Expansion Gaps

## Flexatec 1200 : A01

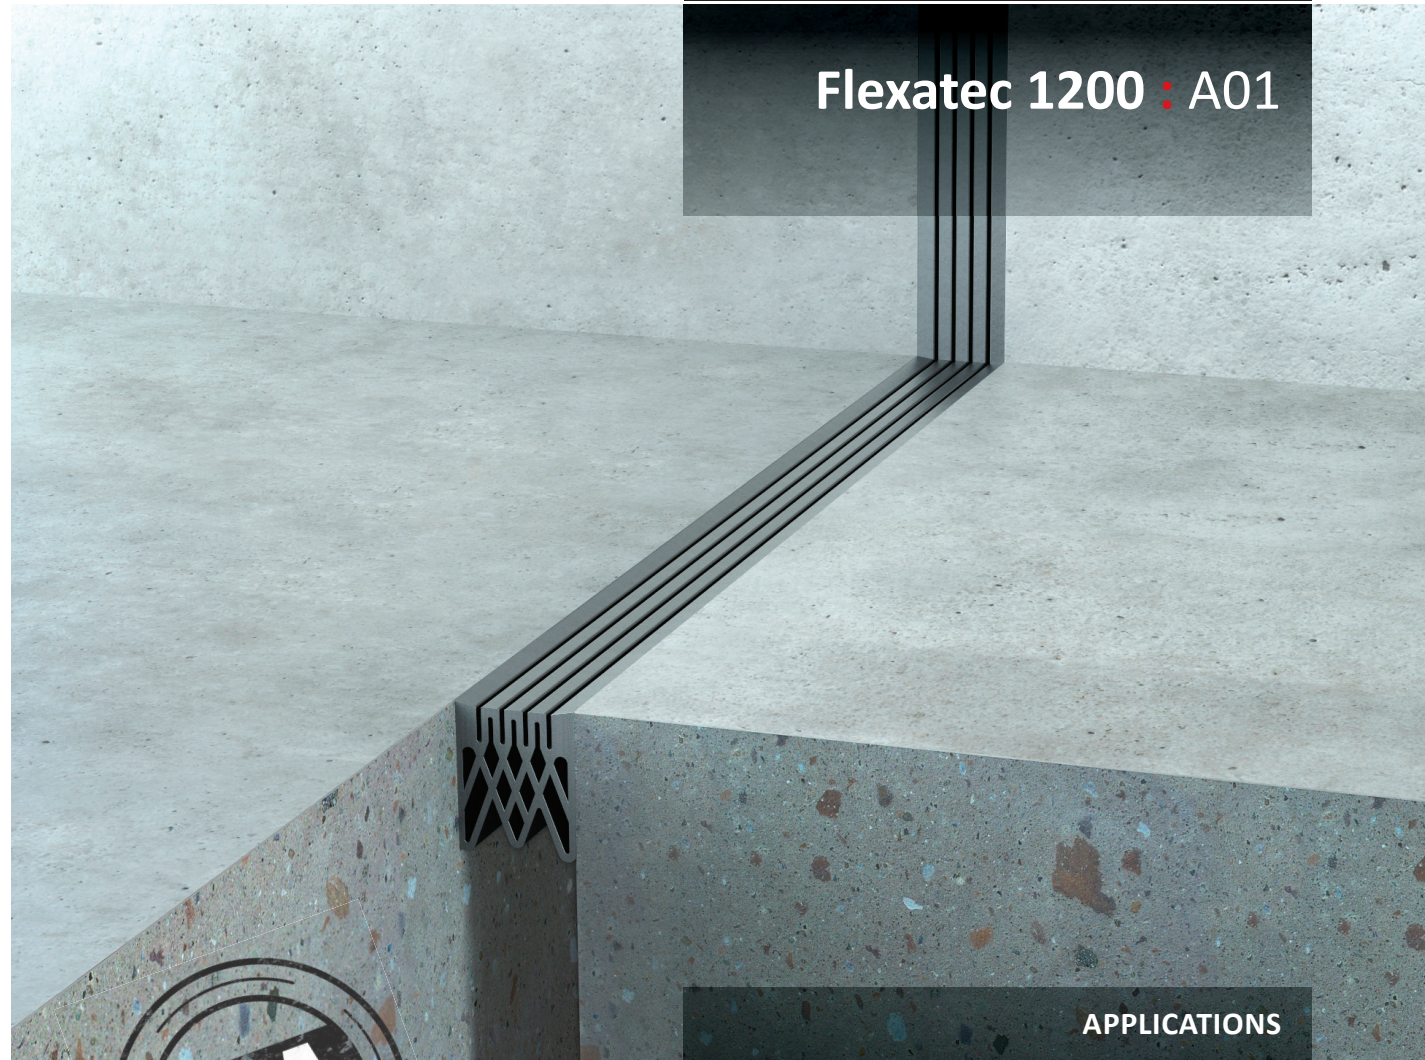

## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets