


## SEAL EXPANSION JOINT

Floor to Floor | Deck to Deck

25 - 100 mm ( 1 - 4" ) Expansion Gaps

# Flexatec 1210 : A01

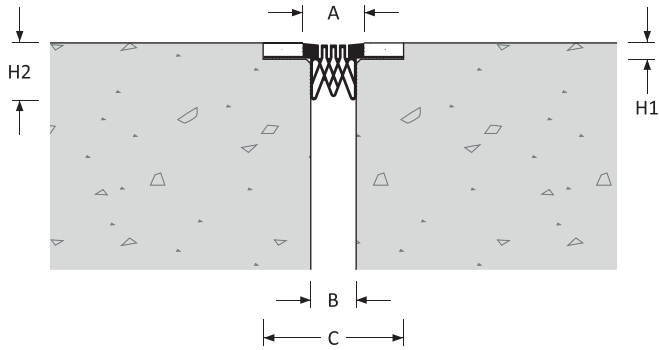

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Floor – Floor Deck – Deck	25	± 7	[15]	-	36 kN	30 kN	120 kN	18	54	40	125	1210-A01-025
	50	± 15	[30]						65	150	1210-A01-050	
	75	± 25	[50]						90	175	1210-A01-075	
	100	± 32	[64]						115	200	1210-A01-100	

**Features**

**Surface**

Ribbed surface for improved slip resistance  
Americans with Disabilities Act (ADA) compliant across the entire movement cycle

**Movement**


Good movement capacity  
ASTM E-1399 Class I: Thermal  
Class II: Wind

**Traffic Frequency per day**

				
> 25,000	-	≤ 10	> 25,000	≤ 100

**System Options**

Gap width(s)	25, 50, 75, 100 mm
Height(s)	18 mm
Metal type(s):	None
Colour(s)	Black coloured seal
Fire barrier	120-240 minutes
Pre-assembly in factory	Contact Vexcolt Europe

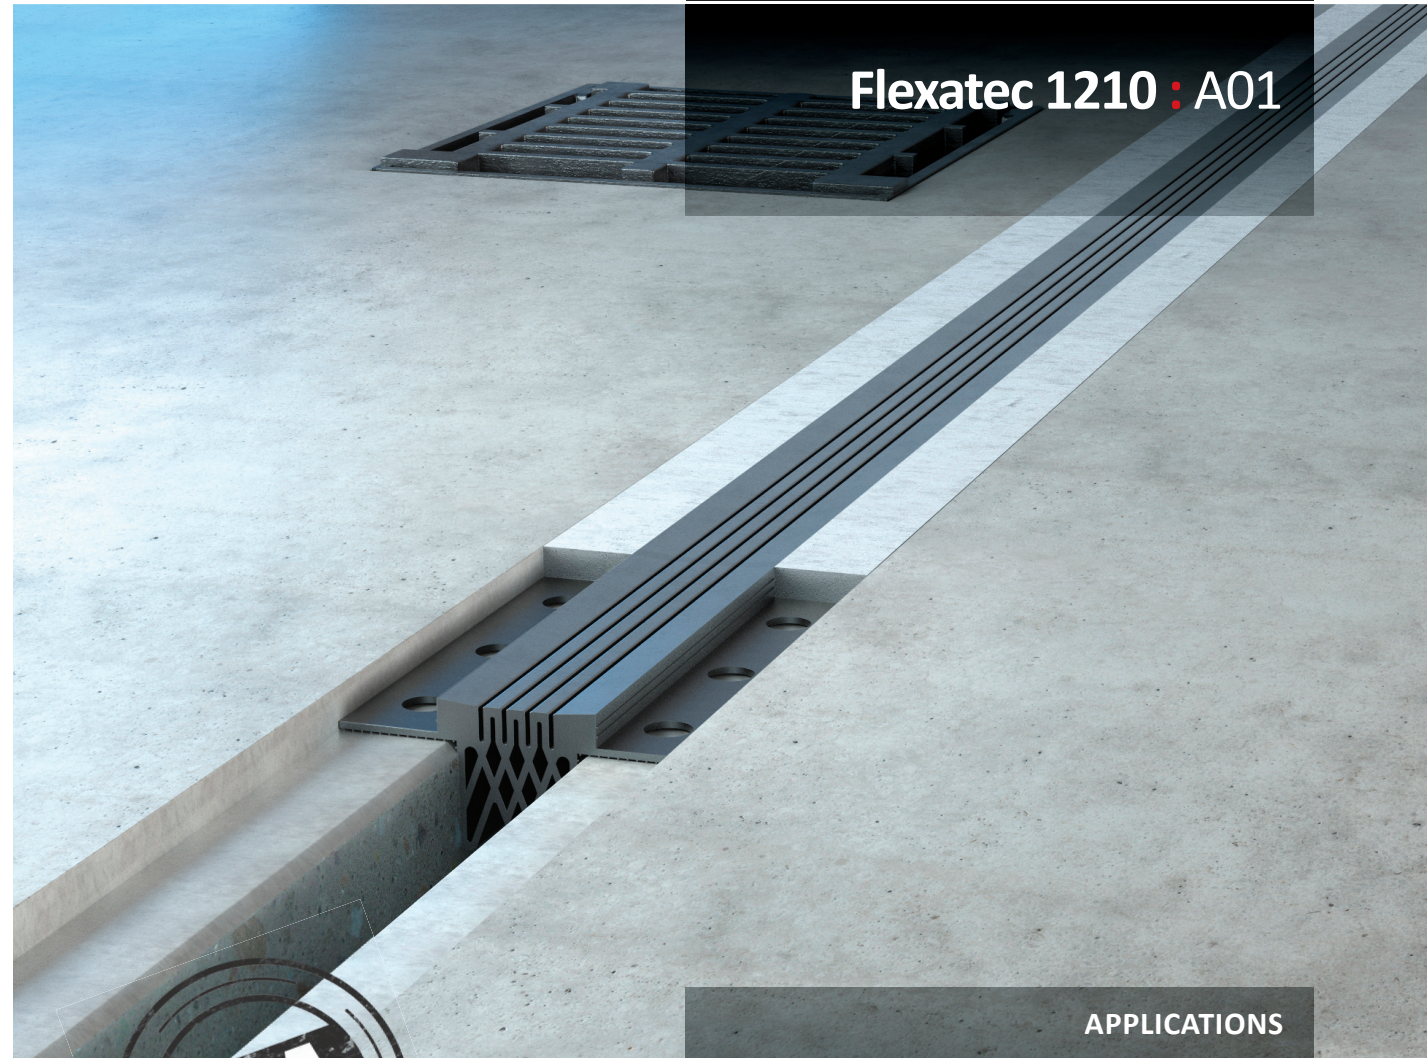

**Flexatec 1210 : A01**



**APPLICATIONS**

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets