


## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


30 - 75 mm ( 1 1/4 - 3" ) Expansion Gaps

# Maxatec 120 : A07-A09

### Maxatec 120 : A07

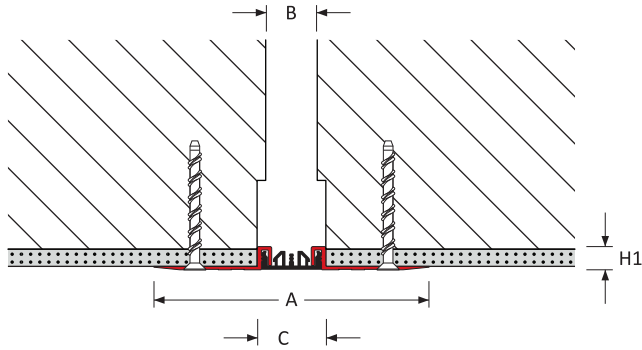

### Maxatec 120 : A09

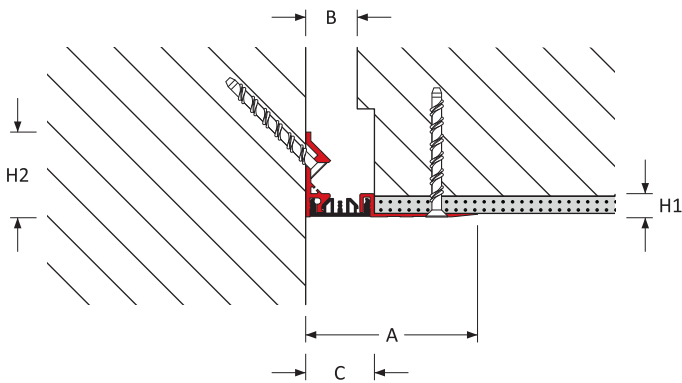

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall – Wall	30	± 5	[10]	–	–	–	–	14	–	160	40	120–A07–030
	50	± 10	[20]	–	–	–	–		191	71	120–A07–050	
	75	± 15	[30]	–	–	–	–		213	93	120–A07–075	
Corner Wall	30	± 5	[10]	–	–	–	–	14	50	100	40	120–A09–030
	50	± 10	[20]	–	–	–	–		131	71	120–A09–050	
	75	± 15	[30]	–	–	–	–		153	93	120–A09–075	

## Features

### Surface

Smooth surface

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day

				
-	-	-	-	-

## System Options


Gap width(s)	30, 50, 75 mm
Height(s)	14 mm
Metal type(s)	Aluminium
Seal colour(s)	Black, Grey, Stone
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt Europe

## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

30 - 75 mm ( 1 1/4 - 3" ) Expansion Gaps

# Maxatec 120 : A07-A09

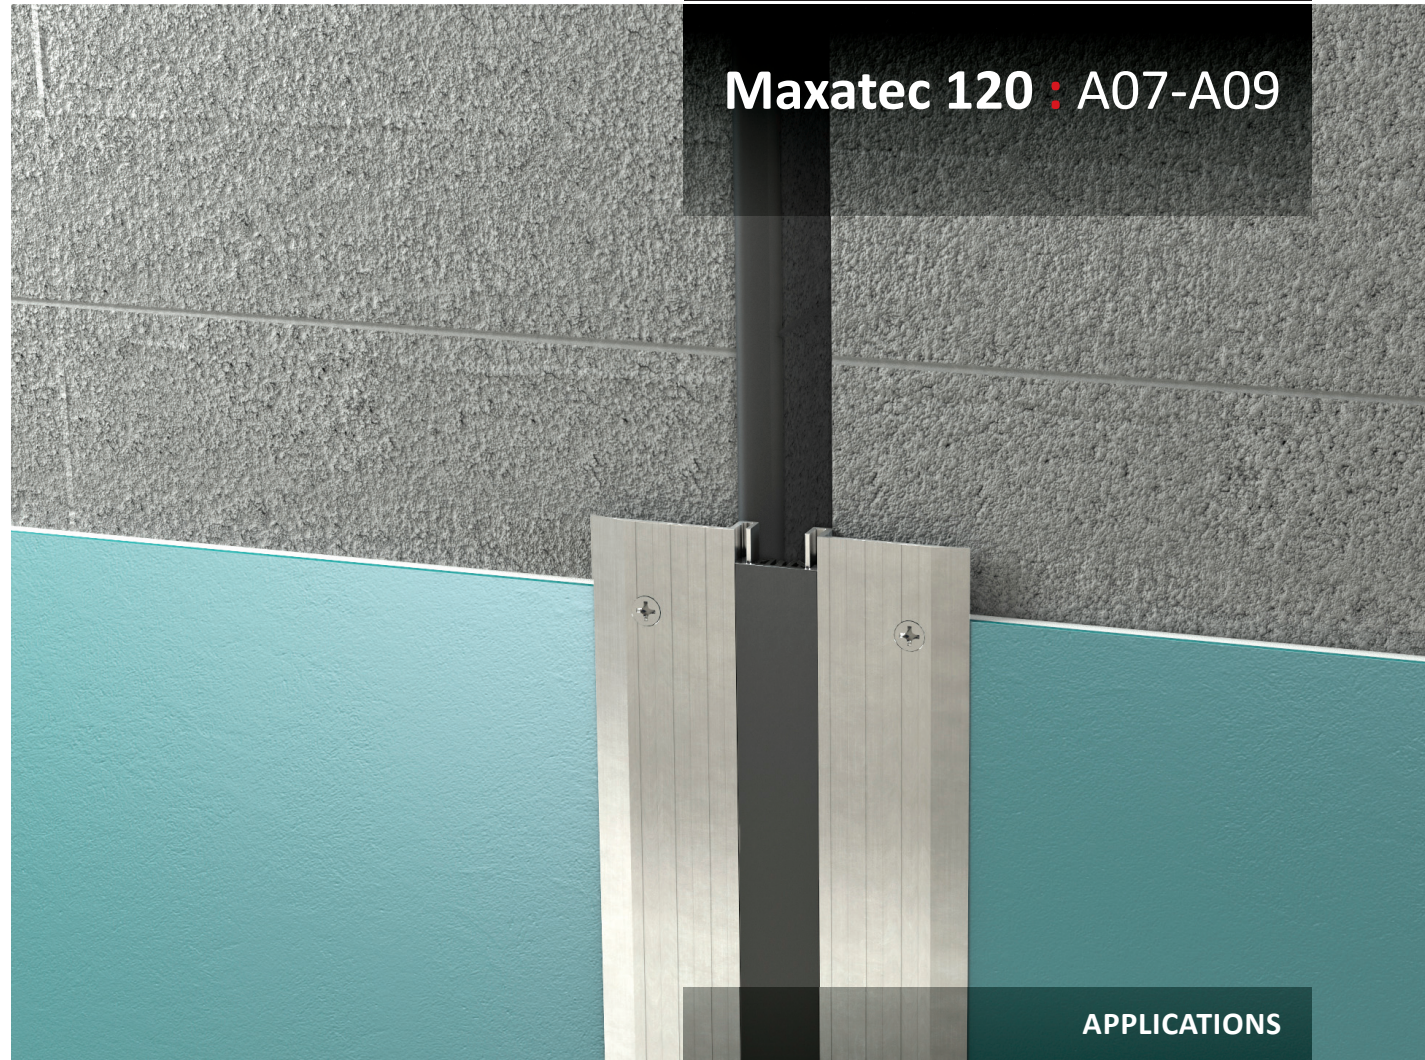

## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
 Department Stores | Distribution & Retail Warehouses  
 Factories | Hospitals | Museums | Offices & Hotels  
 Parking | Places of Worship | Residential Buildings  
 Rail, Metros & Elevated Rail Stations | Roads & Bridges  
 Shopping Centres | Sports Stadiums | Supermarkets