


METAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 50 mm (1 - 2") Expansion Gaps

Megatec 380 : A07-A09

Megatec 380 : A07

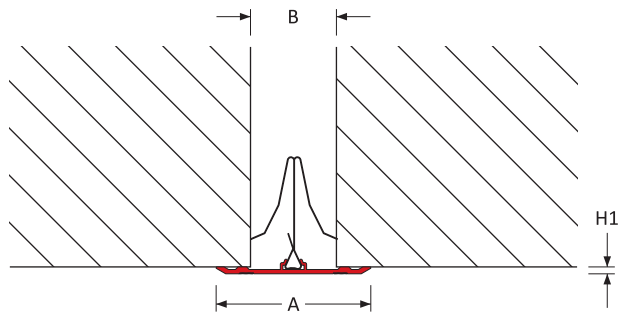

Megatec 380 : A09

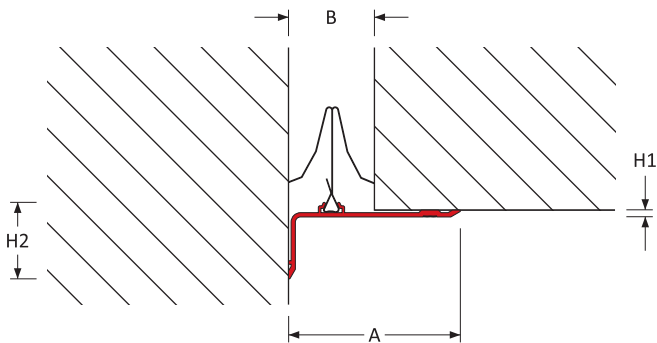

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 12	[25]	-	-	-	-	4	-	60	-	380-A07-025
	50	± 25	[50]	-	-	-	-			90		
Corner Wall	25	± 12	[25]	-	-	-	-	4	40	50	-	380-A09-025
	50	± 25	[50]	-	-	-	-			100		380-A09-050

Features

Surface

Raised surface
No visible fixings

Movement

Good movement capacity
ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day

				
-	-	-	-	-

System Options

Gap width(s)	25, 50 mm
Height(s)	4 mm
Metal type(s)	Aluminium
Colour(s)	20/25 micron clear satin anodised finish aluminium
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt Europe



Megatec 380 : A07-A09

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets