

CONTROL JOINT


Floor to Floor

8 - 16 mm (5/16 - 5/8") Joint Width


Micratec : NL

Micratec : ND

Micratec : NL

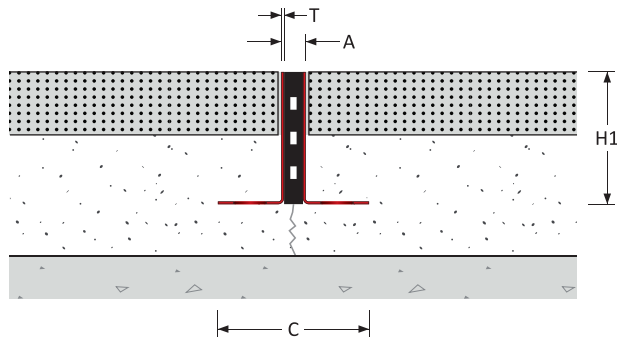

Micratec : ND

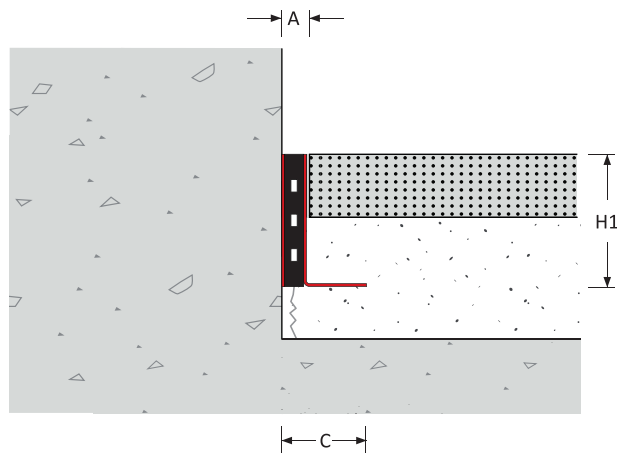

Control Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height H1 (mm)	Thickness T (mm)	Sightline A (mm)	Blockout C (mm)	
Floor – Floor NEOPRENE	-	+0.5/- 1.5	[2.0]	35 kN	190 kN	30 kN	630 kN	22: 30: 42: 55: 70: 90	1.0	8	46	NL-008-(H1)
									1.5	9	46	NL-009-(H1)
									2.0	10	46	NL-010-(H1)
		+1.0/- 3.0	[4.0]						1.0	14	52	NL-014-(H1)
									1.5	15	52	NL-015-(H1)
									2.0	16	52	NL-016-(H1)
Floor – Floor NEOPRENE	-	+0.5/- 1.5	[2.0]	35 kN	190 kN	30 kN	630 kN	22: 30: 42: 55: 70: 90	1.0	8	76	ND-008-(H1)
									1.5	9	76	ND-009-(H1)
									2.0	10	76	ND-010-(H1)
		+1.0/- 3.0	[4.0]						1.0	14	82	ND-014-(H1)
									1.5	15	82	ND-015-(H1)
									2.0	16	82	ND-016-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.

For example Micratec : NL-008-055 denotes a control joint 55mm high.

When specifying or ordering please select metal side plates from aluminium, Stainless steel, 316-grade stainless steel or brass.

When specifying or ordering please select NEOPRENE core colour as black, grey or stone.

We hold a range of in stock available for next day delivery. We can also manufacture bespoke heights, widths and colours.

Please contact our Sales Department for more information.

Features

Surface

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle
8mm minimum visible line width between finishes

Movement

Good movement capacity

Traffic Frequency per day

				
> 25,000	≤ 10,000	≤ 10,000	> 25,000	≤ 1,000

System Options

Sightline width(s)	8, 9, 10, 14, 15, 16 mm
Height(s)	22, 30, 42, 55, 70, 90 mm
Metal type(s)	304-grade Stainless Steel 316-grade Stainless Steel 1005A Aluminium CZ 108 Brass
Metal thickness(es)	1.0, 1.5, 2.0 mm
Seal colour(s)	Black (RAL 7021) NEOPRENE Grey (RAL 7038) NEOPRENE Beige (RAL 1015) NEOPRENE
Pre-assembly in factory	Not applicable



CONTROL JOINT

Floor to Floor

8 - 16 mm (5/16 - 5/8") Joint Width

Micratec : NL
Micratec : ND

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets