


## SLIMLINE EXPANSION JOINT

Floor to Floor

12 - 25 mm ( 1/2 - 1" ) Expansion Gaps

# Intratec 060 : A01

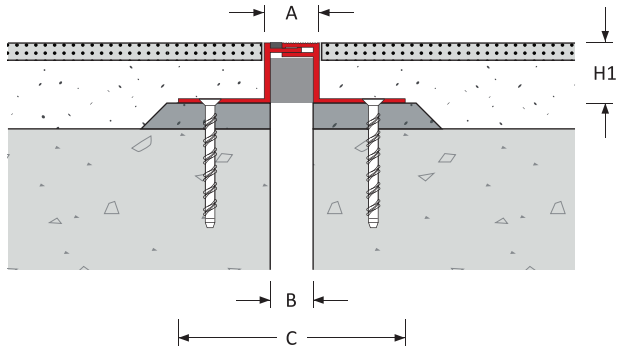

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Floor – Floor	12	± 2.5	[5.0]	5 kN	31 kN	30 kN	120 kN	25: 35: 50	-	20	120	060-A01-012-(H1)
	25	± 5.0	[10.0]				-			32		060-A01-025-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.  
For example Intratec : 060-A01-025-050 denotes an expansion joint 50mm high.

**Features**

**Surface**

Discrete narrow profile  
Hairline serrated surface for improved slip resistance  
Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle

**Movement**

Excellent movement capacity for profile width  
ASTM E-1399 Class I: Thermal  
Class II: Wind

**Traffic Frequency per day**

				
≤ 10,000	≤ 100	≤ 100	≤ 100	≤ 10

**System Options**

Gap width(s)	12, 25 mm
Height(s)	25, 35, 50 mm
Metal type(s)	Aluminium
Seal colour(s)	NA
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt Europe

**SLIMLINE EXPANSION JOINT**

Floor to Floor

12 - 25 mm ( 1/2 - 1" ) Expansion Gaps

**Intratec 060 : A01**



**APPLICATIONS**

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets