


METAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 150 mm (2 - 6") Expansion Gaps

Megatec 370 : A07-A09

Megatec 370 : A07

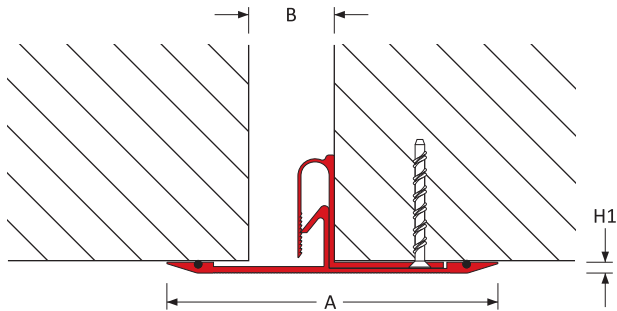

Megatec 370 : A09

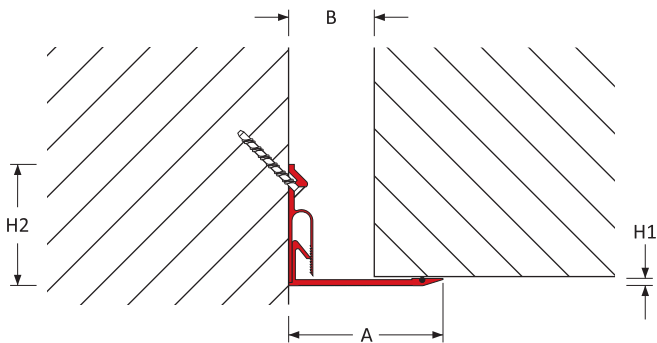

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	25	± 12	[25]	-	-	-	-	6	-	157	-	370-A07-025-(H1)
	50	± 25	[50]							193		370-A07-050-(H1)
	75	± 37	[75]							231		370-A07-075-(H1)
	100	± 50	[100]							268		370-A07-100-(H1)
	150	± 75	[150]							343		370-A07-150-(H1)
Corner Wall	25	± 12	[25]	-	-	-	-	6	38	62	-	370-A09-025-(H1)
	50	± 25	[50]							98		370-A09-050-(H1)
	75	± 37	[75]						106	135		370-A09-075-(H1)
	100	± 50	[100]							173		370-A09-100-(H1)
	150	± 75	[150]							248		370-A09-150-(H1)

Features

Surface

Raised surface
No visible fixings

Movement

High movement capacity
ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day

				
-	-	-	-	-

System Options

Gap width(s)	25, 50, 75, 100, 150 mm
Height(s)	6 mm
Metal type(s)	Aluminium
Colour(s)	20/25 micron clear satin anodised finish aluminium
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt Europe

METAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 150 mm (2 - 6") Expansion Gaps

Megatec 370 : A07-A09

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets